


WOKIN

780012

CORDLESS PIVOT GRIP ELECTRIC SCREWDRIVER KIT INSTRUCTION MANUAL

3.7v
1500mAh

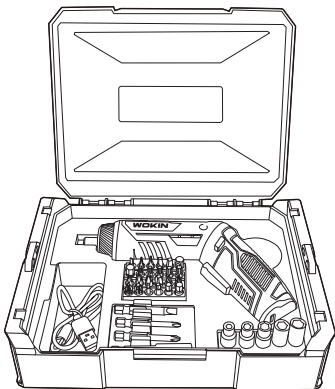

CE **LITHIUM
TECH**



SAVE THIS MANUAL!

You will need this manual for safety instructions, operating procedures and warranty.
Put it and the original sales receipt in a safe dry place for future reference.

IMPORTANT SAFETY INFORMATION

Thank you for purchasing a product. Manufactured to a high standard, this product will, if used according to the instructions below, and properly maintained, give you years of trouble free performance.

IMPORTANT: Please read these instructions carefully. Note the safe operational requirements, warnings & cautions. Use the product correctly and with care for the purpose for which it is intended. Failure to do so may cause damage and/or personal injury and will invalidate the warranty. Keep these instructions safe for future use.



Refer to
instruction
manual



Wear eye
protection

General safety

1. Maintain the screwdriver in good condition. Check moving parts alignment on regular basis.
2. Keep the screwdriver and charger clean for best and safest performance.
3. Remove ill fitting clothing. Remove ties, watches rings and other loose jewellery and contain long hair.
4. Secure loose work pieces with a clamp, vice or other adequate holding device.
5. Avoid unintentional starting.
6. Wear approved safety eye protection.
7. Maintain correct balance and footing. Ensure the floor is not slippery and wear non-slip shoes.
8. Keep children and unauthorized persons away from the working area.
9. Keep screwdriver and charger in a safe, dry, child proof area where the temperature will not exceed 104°F (40°C).

DO NOT allow children to operate the screwdriver.

DO NOT hold unsecured work piece in your hand.

DO NOT carry the screwdriver with your finger on the trigger.

DO NOT use the screwdriver for a task it is not designed for.

DO NOT operate the screwdriver when you are tired or under the influence of alcohol, drugs or intoxicating medication.

DO NOT get the screwdriver or battery charger wet or use in damp or wet locations.

Electrical safety for use of charge

USE ONLY THE SUPPLIED CHARGER FOR CHARGING THE SCREWDRIVER.

⚠ WARNING!

It is the user's responsibility to read, understand and comply with the following electrical instructions:

You must ensure the risk of electric shock is minimized by the installation of appropriate safety devices. An RCCB (Residual Current Circuit Breaker) should be incorporated in the main distribution board. We also recommend that an RCD (Residual Current Device) is used with all electrical products, particularly portable equipment which is plugged into an electrical supply not protected by an RCCB. **You must** also read and understand the following instructions concerning electrical safety.

1. The **Electricity At Work Act 1989** requires all portable electrical appliances, if used on business premises, to be tested by a qualified electrician, using a Portable Appliance Tester (PAT), at least once a year.
2. The **Health & Safety at Work Act 1974** makes owners of electrical appliances responsible for the safe condition of the appliance and the safety of the appliance operator. If in any doubt about electrical safety, contact a qualified electrician.
3. You must ensure that you: Inspect the charger plug, cable and connector for wear and damage to ensure items are safe before connecting to the mains power supply. If worn or damaged, **DO NOT** use.

IMPORTANT: Check that the voltage marked on the charger plug is the same as the power supply to be used.

DO NOT pull the charger plug from the mains socket by the lead.

DO NOT use any other type of charger with this product.

DO NOT try to take the charger plug apart.

DO NOT use the charger plug to charge or power any other electrical item.

DO NOT get the charger wet, or use in wet, damp conditions (for indoor use only).

WARNING!

NEVER substitute a standard 13 amp 3 pin plug, or any other type of plug, for the charger plug.

Battery safety

WARNING!

To reduce the risk of burns or fire:

DO NOT attempt to open, disassemble, modify or service the battery pack.

DO NOT crush, puncture, short external contacts or dispose of in fire or water.

DO NOT expose to temperatures above 140°F [60°C].

Recycle or dispose of the used battery according to local regulation.

INSTRUCTION



Forward, reverse and trigger-lock with soft grip handle for comfort and control. Features locking swivel adjustment from pistol to straight type, quick-release 6mm bit holder, integral LED light to illuminate working area. Lithium-ion battery maintains a high energy density level, has no memory effect, lasting longer than traditional Ni-Cd cells, and will recover from a deep discharge state. Supplied in storage case with accessories.

SPECIFICATION

Battery	3.7V 1.5Ah Lithium-ion	Vibration	0.48M/S ²
Charging Time	2-3Hrs	Uncertainty	1.5M/S ²
Max.Torque	3.0N.M	Noise Pressure	61dB(A)
No-load Speed	250RPM	Noise Power	72dB(A)

Working capacity: screw screws on wooden board:4x30mm screws—120 pcs

OPERATION



1. To charge the screwdriver, insert the charger jack into the charging socket near the base of the screwdriver handle and plug the charger into a mains socket.
2. The indicator light (fig.2) will illuminate to indicate the battery is being charged. When charging is complete (indicator light will be green), unplug the charger from the mains and the screwdriver.
3. Place a bit into the bit holder of the screwdriver. Select the required direction by using the reverse switch (which will lock the screwdriver in its central position) and squeeze the trigger to start the screwdriver. The LED spotlight will light with initial pressure on the trigger.
4. To change the position of the handle, press the handle lock and turn the handle 180° until it clicks into position (fig.2).
5. When finished working, remove the bit from the bit holder, pulling back the quick release bit holder if needed (fig.1). Clean the screwdriver and replace all parts in the storage case. Store the case in a safe, dry, child proof location.

WARRANTY INFORMATION

The battery fitted to this cordless tool is considered to be to consumable item and its ability to accept charge will reduce over time.

⚠ WARNING! – Risk of Hand Arm Vibration Injury

This tool may cause Hand Arm Vibration Syndrome if its use is not managed adequately.

This tool is subject to the vibration testing section of the **Machinery Directive 2006/42/EC**

This tool is to be operated in accordance with these instructions.

Measured vibration emission value (a): 0.48m/s²

Uncertainty value (k): 1.5m/s²

Please note that the application of the tool to a sole specialist task may produce a different average vibration emission. We recommend that a specific evaluation of the vibration emission is conducted prior to commencing with a specialist task.

A health and safety assessment by the user (or employer) will need to be carried out to determine the suitable duration of use for each tool.

NB: Stated Vibration Emission values are type-test values and are intended to be typical.

Whilst in use, the actual value will vary considerably from and depend on many factors.

Such factors include: the operator, the task and the inserted tool or consumable.

NB: ensure that the length of leader hoses is sufficient to allow unrestricted use, as this also helps to reduce vibration.

The state of maintenance of the tool itself is also an important factor, a poorly maintained tool will also increase the risk of Hand Arm Vibration Syndrome.

Health surveillance.

We recommend a programme of health surveillance to detect early symptoms of vibration injury so that management procedures can be modified accordingly.

Personal protective equipment.

We are not aware of any personal protective equipment (PPE) that provides protections against vibration injury that may result from the uncontrolled use of this tool. We recommend a sufficient supply of clothing (including gloves) to enable the operator to remain warm and dry and maintain good blood circulation in fingers etc. Please note that the most effective protection is prevention, please refer to the Correct Use and Maintenance section in these instructions.

CE DECLARATION OF CONFORMITY

WE
ZJG WOKIN INDUSTRIAL CO.,LTD.
350 YANGJIN ROAD, ZHANGJIAGANG,
JIANGSU, CHINA

Declare that the product
780012
CORDLESS PIVOT GRIP ELECTRIC
SCREWDRIVER KIT

Complies with the essential health and safety requirements of the following Directives:
council directive 2006/42/EC


Standards and technical specifications referred to:


EN IEC 55014-1:2021
EN IEC 55014-2:2021
EN IEC 61000-3-2:2019+A1:2021
EN 61000-3-3:2013+A1:2019+A2:2021
Directive(s) :EMC Directive 2014/30/EU
EN 62841-2-2:2014+AC:2015
EN 62841-1:2015+AC:2015+A11:2022

Authorised Signatory and technical file holder

Signed for and on behalf of:
ZJG WOKIN INDUSTRIAL CO.,LTD.
350 YANGJIN ROAD, ZHANGJIAGANG,
JIANGSU, CHINA.

WANG QING
Group Quality Director
on:06/05/2025



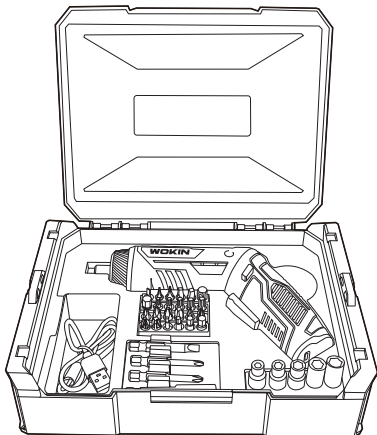

ZJG WOKIN INDUSTRIAL CO.,LTD.

www.wokintools.com

**PROFESSIONALLY
MADE IN CHINA**

WOKIN is a trademark or
registered trademark of
WOKIN TOOLS.

All rights reserved.



For exploded views, please visit our
website. Product structure is
subject to change without notice;
website info shall prevail.

