

WOKIN

624510

CORDLESS PRUNING SHEAR INSTRUCTION MANUAL

INDUSTRIAL


20V

GP
20V

BL
BRUSHLESS
MOTOR

**LITHIUM
TECH**

CE

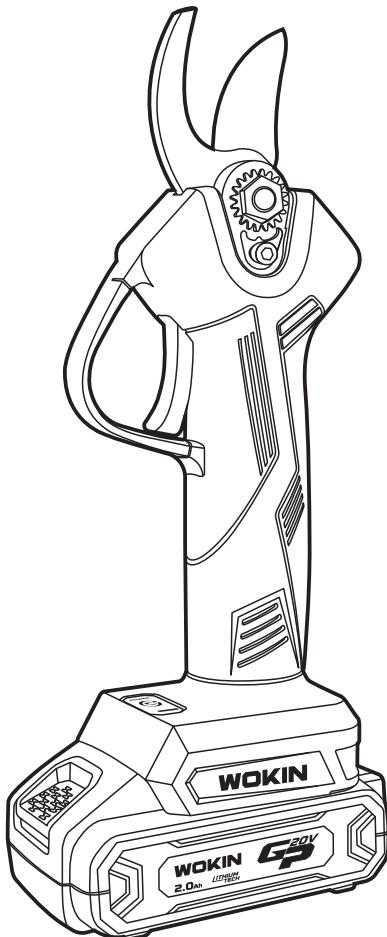

SAVE THIS MANUAL!

You will need this manual for safety instructions, operating procedures and warranty.
Put it and the original sales receipt in a safe dry place for future reference.

IMPORTANT SAFETY INFORMATION

General Power Tool Safety Warnings

WARNING Read all safety warnings and all instructions. Failure to follow the warnings and instructions may result in electric shock, fire and/or serious injury.

WARNING: This appliance is not intended for use by persons [including children] with reduced, physical or mental capabilities or lack of experience or knowledge unless they have been given supervision or instruction concerning use of the appliance by a person responsible for their safety. Children must be supervised to ensure that they do not play with the appliance.

Save all warnings and instructions for future reference

The term "power tool" in the warnings refers to your mains-operated [corded] power tool or battery-operated [cordless] power tool.

Work area safety

1. Keep work area clean and well lit. Cluttered or dark areas invite accidents.
2. Do not operate power tools in explosive atmospheres, such as in the presence of flammable liquids, gases or dust. Power tools create sparks which may ignite the dust or fumes.
3. Keep children and bystanders away while operating a power tool. Distractions can cause you to lose control.

Electrical safety

1. Power tool plugs must match the outlet. Never modify the plug in any way. Do not use any adapter plugs with earthed [grounded] power tools. Unmodified plugs and matching outlets will reduce risk of electric shock.
2. Avoid body contact with earthed or grounded surfaces, such as pipes, radiators, ranges and refrigerators. There is an increased risk of electric shock if your body is earthed or grounded.
3. Do not expose power tools to rain or wet conditions. Water entering a power tool will increase the risk of electric shock.
4. Do not abuse the cord. Never use the cord for carrying, pulling or unplugging the power tool. Keep cord away from heat, oil, sharp edges or moving parts. Damaged or entangled cords increase the risk of electric shock.
5. When operating a power tool outdoors, use an extension cord suitable for outdoor use. Use of a cord suitable for outdoor use reduces the risk of electric shock.
6. If operating a power tool in a damp location is unavoidable, use a residual current device (RCD) or ground fault circuit interrupter (GFCI) protected supply. Use of an RCD or GFCI reduces the risk of electric shock.
7. Power tools can produce electromagnetic fields [EMF] that are not harmful to the user. However, users of pacemakers and other similar medical devices should contact the maker of their device and/or doctor for advice before operating this power tool.

Personal safety

1. Stay alert, watch what you are doing and use common sense when operating a power tool. Do not use a power tool while you are tired or under the influence of drugs, alcohol or medication. A moment of inattention while operating power tools may result in serious personal injury.
2. Use personal protective equipment. Always wear eye protection. Protective equipment such as dust mask, non-skid safety shoes, hard hat, or hearing protection used for appropriate conditions will reduce personal injuries.
3. Prevent unintentional starting. Ensure the switch is in the off-position before connecting to power source and/or battery pack, picking up or carrying the tool.
4. Remove any adjusting key or wrench before turning the power tool on. A wrench or a key left attached to a rotating part of the power tool may result in personal injury.
5. Do not overreach. Keep proper footing and balance at all times. This enables better control of the power tool in unexpected situations
6. Dress properly. Do not wear loose clothing or jewellery. Keep your hair, clothing and gloves away from moving parts. Loose clothes, jewellery or long hair can be caught in moving parts.
7. If devices are provided for the connection of dust extraction and collection facilities, ensure these are connected and properly used. Use of dust collection can reduce dust-related hazards.
8. Do not let familiarity gained from frequent use of tools allow you to become complacent and ignore tool safety principles. A careless action can cause severe injury within a fraction of a second.

Power tool use and care

1. Do not force the power tool. Use the correct power tool for your application. The correct power tool will do the job better and safer at the rate for which it was designed.
2. Do not use the power tool if the switch could not turn it on and off. Any power tool that cannot be controlled with the switch is dangerous and must be repaired.
3. Disconnect the plug from the power source and/or the battery pack from the power tool before making any adjustments, changing accessories, or storing power tools. Such preventive safety measures reduce the risk of starting the power tool accidentally.
4. Store idle power tools out of the reach of children and do not allow persons unfamiliar with the power tool or these instructions to operate the power tool. Power tools are dangerous in the hands of untrained users.
5. Maintain power tools. Check for misalignment or binding of moving parts, breakage of parts and any other condition that may affect the power tool's operation. If damaged, have the power tool repaired before use. Many accidents are caused by poorly maintained power tools.
6. Keep cutting tools sharp and clean. Properly maintained cutting tools with sharp cutting edges are less likely to bind and are easier to control.
7. Use the power tool, accessories and tool bits etc. in accordance with these instructions, taking into account the working conditions and the work to be performed. Use of the power tool for operations different from those intended could result in a hazardous situation.
8. Keep handles and grasping surfaces dry, clean and free from oil and grease. Slippery handles and grasping surfaces do not allow for safe handling and control of the tool in unexpected situations.

Battery Tool Use and Care

1. Recharge only with the charger specified by the manufacturer. A charger that is suitable for one type of battery pack may create a risk of fire when used with another battery pack.
2. Use power tools only with specifically designated battery packs. Use of any other battery packs may create a risk of injury and fire.
3. When battery pack is not in use, keep it away from other metal objects, like paper clips, coins, keys, nails, screws or other small metal objects that can make a connection from one terminal to another. Shorting the battery terminals together may cause burns or a fire.
4. Under abusive conditions, liquid may be ejected from the battery; avoid contact. If contact occurs, flush with water. If liquid contacts eyes, additionally seek medical help. Liquid ejected from the battery may cause irritation or burns.
5. Do not use a battery pack or tool that is damaged or modified. Damaged or modified batteries may exhibit unpredictable behaviour resulting in fire, explosion or risk of injury.
6. Do not expose a battery pack or tool to fire or excessive temperature. Exposure to fire or temperature above 130 °C may cause explosion.
7. Follow all charging instructions and do not charge the battery pack or tool outside the temperature range specified in the instructions. Charging improperly or at temperatures outside the specified range may damage the battery and increase the risk of fire.

Service

1. Have your power tool serviced by a qualified repair person using only identical replacement parts. This will ensure that the safety of the power tool is maintained.
2. Never service damaged battery packs. Service of battery packs should only be performed by the manufacturer or authorized service providers.
3. Follow instruction for lubricating and changing accessories.

Usage and Care for Pruning Shear

1. Do not cut branches beyond the specified diameter indicated, do not cut hard items such as metals, stone or any other non-plant materials. If the blades are worn or damaged, please replace the blades.
2. Keep the pruning shear clean, use a clean cloth to clean the pruning shear, battery and charger (do not use any abrasive or solvent-based cleaning agent), use a soft brush or a dry to clean the dust off the pruning shear head.
3. Do not immerse the pruning shear, battery or charger in any liquid.
4. Follow instructions as given for proper use of the pruning shear, do not use the pruning shear when the tool itself, battery or charger is damaged.
5. Do not use the pruning shear if it could not operate or shut down properly, send for servicing immediately. It is dangerous to use the pruning shear when the tool could not operate or shut down properly.
6. Please ensure the power pruning shear is powered OFF during any adjustment, changing accessories or storage. This protective measure aims to reduce the risk of accidental pruning shear activation.
7. Please ensure the bladed are closed when not in use, storage of the pruning shear must keep out of reach from CHILDREN, do not allow any person who is not familiar with the pruning shear operation or instruction to use the pruning shear, it is dangerous to use the pruning shear without proper training and understanding.
8. The use of the pruning shear must comply with instructions stated in this manual and methods of use as well as taking in considerations of the working environment and nature of work undertaken. The use of the pruning shear not within its stated capability and specifications is dangerous.
9. Remove all dirt from the moving and fixed blades after each use, thereafter apply lubricant on the blade side where both moving and fixed blade contact. This will ensure the blades are maintained in good conditions and reduce resistance during use prolonging the pruning shear and blade lifespan.

Battery Safety

⚠ WARNING:

Li-Ion batteries, if incorrectly used, stored or charged are a fire, burn and explosion hazard.

1. Keep the battery out of reach of children.
2. ONLY charge Li-Ion batteries using the charger provided or designed specifically for your product.
3. ONLY use Li-Ion batteries provided with a product or specifically designed to be compatible.
4. Allow batteries to cool for 15 minutes after charging or heavy use. Failure to follow these instructions may cause overheating or fire.
5. When not in use batteries should be stored at room temperature.
6. Ensure that battery contacts cannot accidentally short in storage. Keep batteries clean; foreign objects or dirt may cause a short. Keep away from other metal objects, for example, paperclips, coins, keys, nails and screws.
7. Under abusive conditions, liquid may be ejected from the battery. This liquid may cause skin irritation or burns. Avoid contact. If contact accidentally occurs, flush with water. If liquid contacts eyes, seek medical help.
8. DO NOT open, disassemble, crush, heat above 60°C or incinerate. Do not dispose of in fire or similar.

Battery Charger Safety

Use the battery charger correctly

1. Refer to the section of this manual relating to use of the battery charger before attempting to charge the battery.
2. Do not attempt to use the charger with any batteries other than those supplied. Keep your battery charger clean; foreign objects or dirt may cause a short or block air vents. Failure to follow these instructions may cause overheating or fire.
3. If the supply cord is damaged, it must be replaced by the manufacturer, its service agent or similarly qualified persons in order to avoid a hazard.

⚠ WARNING:

This charger can only be used to charge the batteries which has WOKIN GP20V symbol. If it is used to charge other kinds of batteries, there is a risk of explosion.

DO NOT attempt to recharge non-rechargeable batteries.

SAVE THESE INSTRUCTIONS

⚠ WARNING:

DO NOT let comfort or familiarity with product [gained from repeated use] replace strict adherence to safety rules for the subject product. MISUSE or failure to follow the safety rules stated in this instruction manual may cause serious personal injury.

SPECIFICATIONS

Rated Voltage	20VDC
Shear capacity	Ø20/30mm(3/4" / 1-3/16")
Net weight	2.4kg(5.3lbs)
Battery pack Voltage	20VDC
Battery capacity	2.0Ah
Charger	
Input Voltage	220-240VAC 50/60Hz
Output Voltage	20VDC
Rated output current	2.4A
Charging Time	1hr fast charging(2.0Ah battery)
Protection class	<input type="checkbox"/>



Note: Symbology

Pay attention to all the signs and symbols shown in these instructions and on your tool. Make a note of these signs and symbols. If you interpret the signs and symbols correctly, your work with the machine will be safer and better.


	Read the instructions for use before starting the machine.
	Wear safety goggles.
	Wear ear protection.
	Wear good quality, strong gloves.
	Always use breathing apparatus when machining materials which generate dust.
	Operating environmental temperature.
	Keep away from fire
	Do not throw it into water

	WARNING
	Battery pack is part of the recyclable resources
	Class II
	Never place hands near the cutting area of the electric pruning shear during operations.
	Polarity
	Waste electrical products should not be disposed of with household waste. Please recycle where facilities exist. Check with your Local Authority or retailer for recycling advice.
	Batteries and rechargeable batteries are not household waste! As a consumer, you are required by law to dispose of all batteries and accumulators, whether or not they contain harmful substances*, at a collection point in your municipality / neighborhood or in commerce so that they can be disposed of in an environmentally sound manner.

FUNCTIONS

PRODUCT OPERATION**Setting up**

1. Open the package, insert the the battery into the power connector of the pruning shear with designated direction, see figure1.
2. Press the power button till the LED display indicator change to green. After the sound "Di Di-" indicate that is activated. Double click the trigger, the pruning shear blades will automatically open.
3. Normal Pruning: Press trigger to close the blades and release the trigger to open blades.
4. Press trigger for 2 seconds. Release trigger after hear the sound "Di-" to adjust the size the cut diameter. Conversion between large and small cut diameter can be achieved by the same operation.
5. "Di Di-"The pruning shear comes into standby mode of [children's lock function].
The pruning shear can only be reopened with double click the trigger.
7. Without operation for 3 minutes when the blades open, after sound "Di Di-" the pruning shear comes into standby mode of [children's lock function], can only be reopened with double click the trigger. Another without operation for 10 minutes, after sound "Di-Di Di-Di" the pruning shear automatic shutdown. When the blades closed and pruning shear comes into standby mode of [children's lock function], without operation for 10 minutes, after sound "Di-Di Di-Di" the pruning shear automatic shutdown.
8. Before operation, in order to see if the pruning shear and battery performances well, please press the trigger to close and release the trigger to open the blades without cutting anything, repeat this for a few times.
9. Start working after all normal.

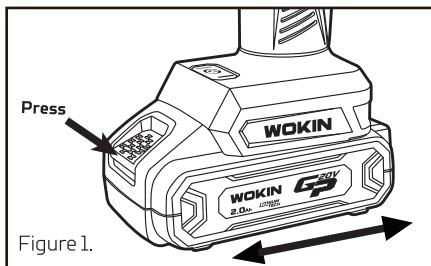**Packing up**

1. Press the trigger and hold for a few seconds and then release, the blade will close and will not open.
2. Switch off the battery, disconnect the battery.
3. Tidy up, clean up and pack the pruning shear into the tool box.

Battery Charging

The battery connected to the charger see figure2, the charger plug connected to the power socket, the LED indicator on the battery will turn RED during charging and turn GREEN when the battery is fully charged.

Cautions

1. Before charging, please ensure battery power switch is in OFF position. During charging, it is normal for the charger and battery to be warm.
2. If the battery is not used for a long period of time, it is recommended to charge the battery once every 3 months, this is to ensure the battery life is not affected by low usage.
3. For new battery or battery unused for a long time, it will need about 5 charge-discharge cycles before achieving full capacity.
4. Do not recharge a fully charged battery just after a few minutes of usage, this will reduce the battery lifespan and efficiency.
5. Do not use a damaged battery and do not disassemble the charger or battery.
6. Do not place battery near high temperature heat source, the battery will explode in fire or long exposure to high temperature heat source.
7. Do not charge the battery in outdoor or humid environment.
8. It is normal for the pruning shear to reduce cutting diameter when the battery capacity is getting low.
9. Do not use the pruning shear during charging. It must be disconnected from the battery during charging.
10. Do not store the battery in a humid environment.

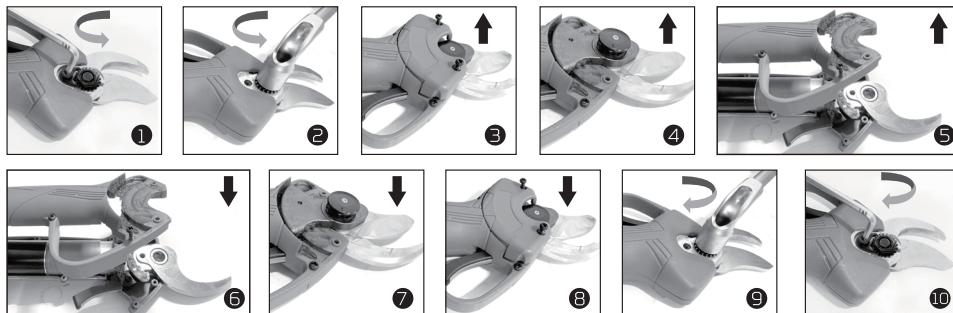


Figure 2.

Blade Replacement


When the moving blade no longer crosses the fixed blade throughout its length, or when the power pruning shear could no longer have a clean cut after grinding, blade replacement is recommended with the following steps:

1. For safety, before replacing the blade, please ensure the pruning shear is power OFF and disconnect the battery from tool.
2. Refer to the diagrams below on the procedure to replace the blade.
3. Clean up the blade after replacing, connect to power cable to battery, power ON to test the blade, close up the blade to complete the whole procedure.



*Fixed and movable blades can be replaced individually; do not worry about the size of the Replacement blade aperture, the opening will automatically return to normal size during power ON after completing blade replacement.

INDICATING THE REMAINING BATTERY PACK

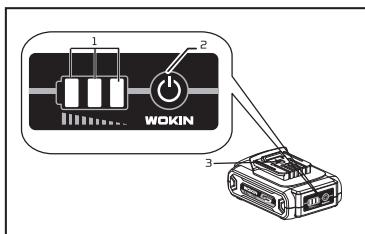

1. Indicator lamps 2. Check button. 3.DC port

Press the check button on the battery pack to indicate the remaining battery capacity. The indicator lamps light up for a few seconds.

Indicator lamps	Remaining capacity
Lighted	Off
■ ■ ■	75% to 100%
■ ■ ■	35% to 75%
■ ■ ■	5% to 35%

NOTE: Depending on the conditions of use and the ambient temperature, the indication may differ slightly from the actual capacity.

MAINTENANCE

WARNING: ALWAYS disconnect from the mains power supply, before carrying out any maintenance/cleaning of the charger. Remove the battery before carrying out any maintenance/cleaning of the appliance .

Note: Both the appliance and the charger contain no user-serviceable parts. If the device does not perform as outlined in this manual, return it to an authorised service centre for repair.

General Inspection

1. Regularly check that all the fixing screws are tight.
2. Inspect the supply cord of the tool, prior to each use, for damage or wear. Repairs should be carried out by an authorised service centre. This advice also applies to extension cords used with this tool.

Storage

1. Store this tool carefully in a secure, dry place out of the reach of children.
2. Do not store the tool and battery pack in locations where the temperature may reach or exceed 40 °C.

Disposal

Always adhere to national regulations when disposing of power tools that are no longer functional and are not viable for repair.

1. Do not dispose of power tools, or other waste electrical and electronic equipment (WEEE), with household waste.
2. Contact your local waste disposal authority for information on the correct way to dispose of power tools

TROUBLESHOOTING

Problem	Possible causes	Likely solutions
Tool will not start.	<ol style="list-style-type: none">1. Battery Pack not properly connected.2. Battery Pack not properly charged.3. The power control switch is not on.4. Battery Pack worn out.5. Internal damage or wear. (Carbon brushes or Trigger, for example.)6. Contact chips of switch or battery pack deformed.7. Battery is not suitable for WOKIN GP20V lithium-ion power platform system.8. Overload operation.	<ol style="list-style-type: none">1. Remove Battery Pack, make sure there are no obstructions, clean battery contacts on tool, reinsert the Battery Pack according to its shape (it should only fit one way), and press firmly until the Battery Pack locks in place.2. Make sure Charger is connected and operating properly. Give enough time for Battery Pack to recharge properly.3. Turn on the power control switch.4. Dispose of old Battery Pack properly or recycle. Replace Battery Pack.5. Have technician service tool.6. Replace switch or Battery Pack7. Replace the battery of WOKIN GP20V.8. Stop to use and restart the machine after cooling.
Tool operates slowly.	<ol style="list-style-type: none">1. Cutting superhard branches.2. Battery Pack worn out.3. Low battery.4. Blade dull or damaged.	<ol style="list-style-type: none">1. Loosen the trigger.2. Dispose of old Battery Pack properly or recycle. Replace Battery Pack.3. Recharge or replace a fully charged battery.4. Keep the blade sharp or replace blade as actual requirements. It is necessary to disconnect power supply before replacing and sharpening blades.
Excessive noise or rattling.	Internal damage or wear. (gear or bearings, for example.)	Have technician service tool.
Overheating.	<ol style="list-style-type: none">1. Forcing tool to work too fast.2. Blocked motor housing vents.	<ol style="list-style-type: none">1. Allow tool to work at its own rate.2. Clean the Blocked motor housing vents

CE DECLARATION OF CONFORMITY

WE

ZJG WOKIN INDUSTRIAL CO.,LTD.
350 YANGJIN ROAD, ZHANGJIAGANG,
JIANGSU, CHINA.

Declare that the product

624510

CORDLESS PRUNING SHEAR

Complies with the essential health and safety requirements of the following Directives:

council directive 2006/42/EC

Standards and technical specifications referred to:

Machinery Directive 2006/42/EC,

Low Voltage Directive 2014/35/EU,

EN 62841-1:2015/AC:2015,

EN ISO 12100:2010, EN IEC 61000-6-4:2019, EN IEC 61000-6-2:2019

Authorised Signatory and technical file holder


Signed for and on behalf of:


ZJG WOKIN INDUSTRIAL CO.,LTD.
350 YANGJIN ROAD, ZHANGJIAGANG,
JIANGSU, CHINA.

CHEN XIAO CHENG

Group Quality Director

on:07/02/2022

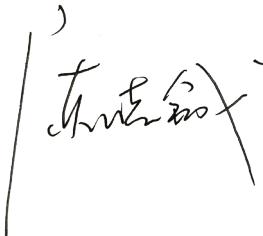

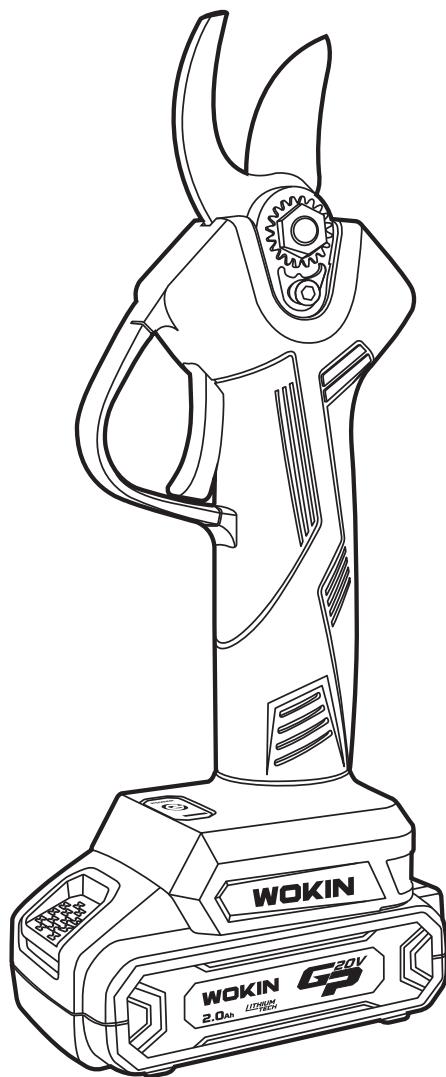

**ZJG WOKIN
INDUSTRIAL
CO.,LTD.**

www.wokintools.com

**PROFESSIONALLY
MADE IN CHINA**

WOKIN is a trademark or
registered trademark of
WOKIN TOOLS.

All rights reserved.

