

WOKIN

CORDLESS INFLATOR INSTRUCTION MANUAL

626022


20v

Voltage: 20V

+

12v

Input: DC 12V

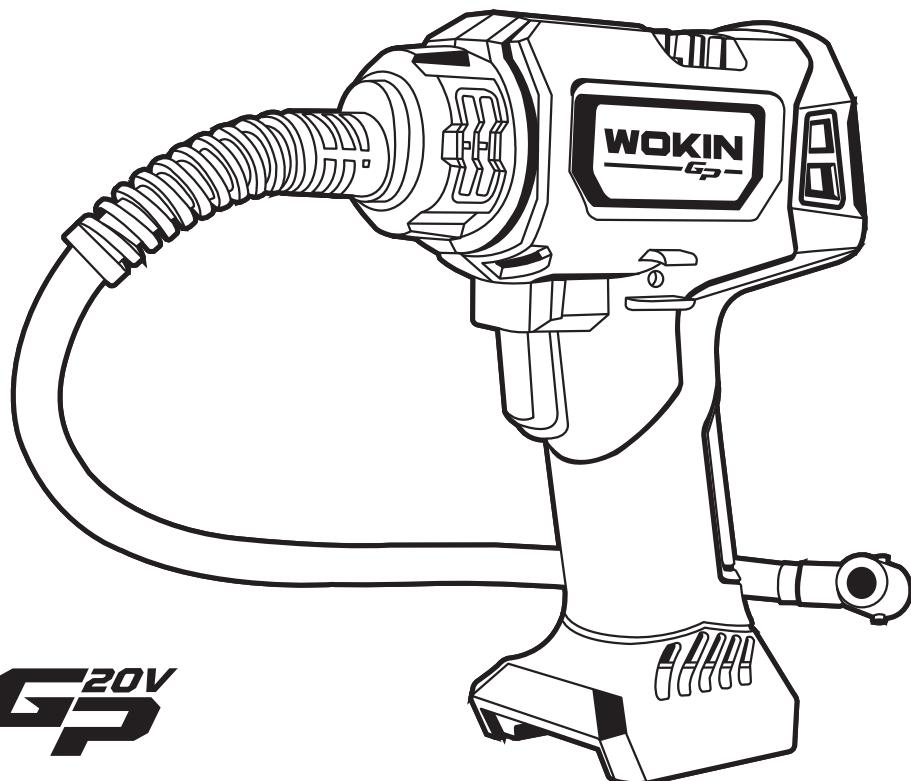

**G^{20V}
GP**

CE

**LITHIUM
TECH**



SAVE THIS MANUAL!

You will need this manual for safety instructions, operating procedures and warranty. Put it and the original sales receipt in a safe dry place for future reference.

IMPORTANT SAFETY INFORMATION

Read and understand all instructions. Failure to follow all instructions listed below may result in electric shock, fire or serious personal injury.

 **When using electrical appliances, basic precautions should always be taken and observed, including the following.**

Electrical safety

1. To reduce the risk of electrical shock, do not put inflator in water or other liquid. Do not place or store appliance where it can fall or be pulled into a tub or sink.
2. Use this product only with batteries and chargers.

Personal safety

1. When operating the inflator, keep alert, observe what you are doing, and use common sense. Do not use the inflator when you are tired or under the influence of drugs, alcohol or drugs. Inattention when operating the inflator may cause serious personal injury.
2. When operating the inflator, always maintain a proper foothold and balance. The correct foothold and balance can better control the inflator in unexpected situations.
3. Goggles shall be worn during use, and dust-proof masks, anti-skid safety shoes, hard hats or hearing protection devices must be used if necessary.
4. Do not wear loose clothes and keep long hair. Loose clothes, jewelry or long hair may be sucked into the air inlet, causing wind blockage and even damaging the machine.
5. Do not use on ladders or unstable supports. A stable foothold on a solid ground can better control the inflator in case of accidents.
6. Do not disassemble the inflator. Do not operate the inflator near flammable liquid or in gas or explosive environment. Internal sparks may ignite smoke.
7. Do not store the inflator in a humid or high-temperature environment. Do not store at a temperature below 10 °C or above 35 °C.

Use and maintenance of inflator

1. Before each use, check whether the hose is fragile or worn to ensure that all connections are secure. Do not use if defects are found. Purchase new hoses or notify an authorized service center for inspection or repair.
2. Slowly release all pressure in the system, dust and debris may be harmful. If the switch cannot be opened or closed, do not use the inflator. The inflator that cannot be controlled by the switch is dangerous and must be repaired.
3. Before making any adjustment, replacing accessories or storing the inflator, please put the switch in the off position. Such preventive safety measures can reduce the risk of accidentally starting the inflator.
4. Store idle inflators out of reach of children and other untrained personnel. Inflators are dangerous in the hands of untrained users.

Important safety instructions

5. Check whether the moving parts are misaligned or stuck, whether the parts are broken and any other conditions that may affect the operation of the inflator. If damaged, please repair the inflator before use. Many accidents are caused by poorly maintained tools.
6. Use only accessories recommended by the manufacturer for your model. Accessories suitable for one inflator may cause injury risk when used on another inflator.
7. Keep the inflator and its handle dry, clean and free of grease. Always use clean cloth when cleaning. Never use brake fluid, gasoline, petroleum products or any strong solvent to clean the inflator. Following this rule will reduce the risk of loss of control and deterioration of the shell plastic.
8. Do not point any inflator at yourself or others.
9. Keep the outside of the inflator dry, clean and free of oil and grease. Always use clean cloth when cleaning. Do not use brake fluid, gasoline, petroleum products or any strong solvent to clean the device. Following this rule will reduce the risk of deterioration of the shell plastic.
10. Do not exceed the pressure rating of any component in the system.
11. Protect material and air lines from damage or puncture. Keep hoses and power cords away from sharp objects, chemical leaks, oil, solvents and wet floors.

Safety precautions for inflator

1. Only qualified maintenance personnel can repair the inflator. Repair or maintenance by unqualified personnel may cause injury risk. Only use the same replacement parts when servicing the inflator. Follow the instructions in the maintenance section of this manual. The use of unauthorized parts or non-compliance with maintenance instructions may result in the risk of electric shock or injury.
2. Understand your inflator, carefully read the operation manual, understand its application and limitations, and specific potential hazards related to this tool. Following this rule will reduce the risk of electric shock, fire or serious injury.
3. Explosion risk: do not operate the inflator so that the output pressure is greater than the marked maximum pressure of the object to be inflated. Do not use it under a pressure greater than 6.8 PA.
4. In order to reduce the risk of electric shock, do not get wet and store indoors.
5. Check the device for cracks, pinholes or other defects that may make the inflator unsafe. Do not cut or drill holes on the inflator.
6. Ensure that there is no obstacle or hose winding in the hose. Do not block the inflation or deflation outlet during operation, which may cause the inflator to lose balance and damage the machine.
7. Use the inflator only for its intended use and do not change or modify the original design or function of the device.
8. Be careful that misuse and improper operation of this inflator may cause injury to yourself and others. Do not leave the inflator unattended when the air hose is connected to the inflator.
9. Do not continue to use the inflator or hose with air leakage or abnormal function.
10. When adjusting, repairing or not using the inflator, be sure to disconnect the air source and power supply.

Safety precautions for inflator

11. Do not attempt to pull or carry the inflator through the hose.
12. In addition to all safety rules of the inflator, all safety regulations recommended by the inflator manufacturer must be observed. Following this rule will reduce the risk of serious personal injury.
13. This product is only for family use, not for industrial production.
14. Do not use the inflator as a breathing device, do not spray compressed air onto people or animals, and do not blow dust and dirt to yourself or others. Following this rule will reduce the risk of serious injury.
15. Protect the lungs. If there is dust during operation, please wear a mask or dust mask. Following this rule will reduce the risk of serious personal injury.
16. Do not use this inflator to spray chemicals. Toxic fumes or chemicals may damage the parts of the inflator.
17. Burst risk: carefully monitor the object during inflation to reduce the risk of over inflation. During inflation, use reliable pressure gauge regularly. The pressure gauge on the inflator is only for reference, so it has no binding force on the accurate value.
18. Keep these instructions: always refer to them and use them to guide others who may use this inflator. If you lend this inflator to others, I will also lend them these instructions.

SPECIFICATIONS

Great for Car/RV/SUV/Light Truck Tires and small inflatables

Digital pressure gauge automatically shuts off at desired pressure

Cordless design, easy to carry

Comes with nozzle accessories

Operate with 20V battery (included) or 12V power cord

Built in battery indicator

INCLUDE

1-Ball Nozzle, 1-Tire Valve Nozzle, 1-Air Bed Nozzle,

1- 12V Car Plug-in Power base

1-20V Li-ion Battery

1-Charger

1-Tool Bag

SPECIFICATIONS

Voltage	20V 
Input	DC 12V 
Max. air pressure	120PSI
Flow	28L/min
Airhorse length	60cm
1 pc cord with cigarette lighter	3m

TOOL ONLY BATTERY & CHARGER SOLD SEPARATELY

1. Due to our continuing program of research and development, the specifications herein are subject to change without notice.
 2. Specifications and battery pack may differ from country to country.

**Note: Symbology**

Pay attention to all the signs and symbols shown in these instructions and on your tool. Make a note of these signs and symbols. If you interpret the signs and symbols correctly, your work with the machine will be safer and better.


	Read the instructions for use before starting the machine.
	Wear safety goggles.
	Wear ear protection.
	Wear good quality, strong gloves.
	Always use breathing apparatus when machining materials which generate dust.
	Operating environmental temperature.
	Keep away from fire
	Do not throw it into water

	WARNING
	Battery pack is part of the recyclable resources
	Class II
	For indoor use only
	Polarity
	Waste electrical products should not be disposed of with household waste. Please recycle where facilities exist. Check with your Local Authority or retailer for recycling advice.
	Batteries and rechargeable batteries are not household waste! As a consumer, you are required by law to dispose of all batteries and accumulators, whether or not they contain harmful substances *, at a collection point in your municipality / neighborhood or in commerce so that they can be disposed of in an environmentally sound manner.

Parts list and schematic diagram

- A. Digital display
- B. Start switch
- C. Set button
- D. Light switch
- E. Tire pressure increase/decrease button
- F. Rubber cover handle
- G. Battery
- H. LED lighting
- I. Air hose buckle
- J. Air hose
- K. Air chuck
- L. Nozzle interface storage area
- M. Air inlet
- N. Cigarette lighter charging line
- O. 220V charger
- P. Charger interface

TOOL ONLY
BATTERY & CHARGER
SOLD SEPARATELY

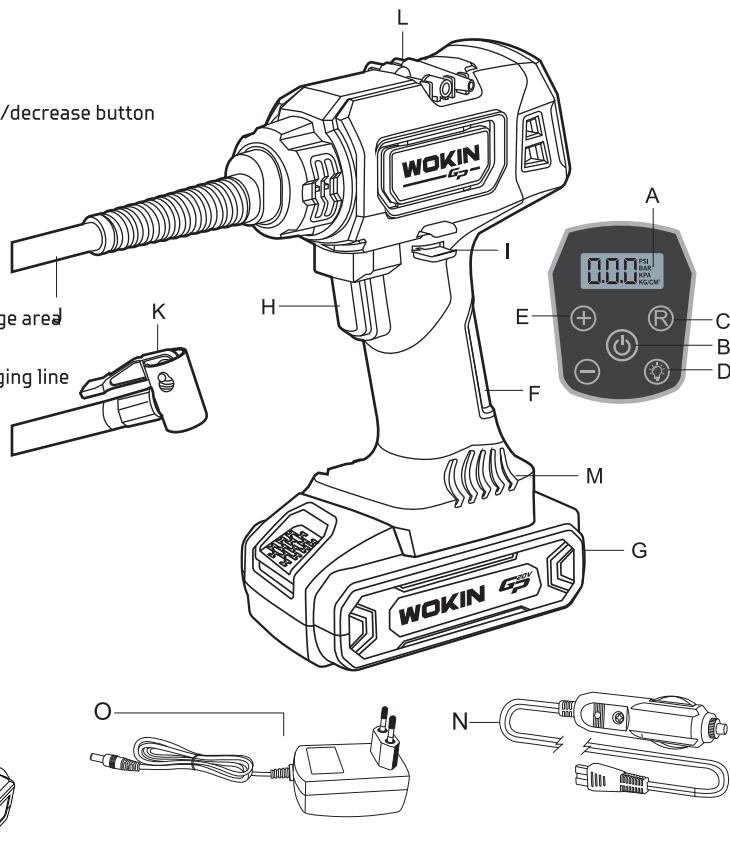

BATTERY PACK

1. The battery is not fully charged. Please charge the battery for 3-5 hours before the first use. The battery is completely exhausted. The normal charging time is 3-5 hours. Please unplug the charging wire in time after full charging.

2. When the performance of the tool begins to decline, replace the new battery; Extreme heat is the most destructive to the battery. Heat generated. The more the amount, the faster the battery loses power, and the overheating of the battery will shorten the service life.


3. When using the tool, even after the tool has good performance, do not discharge excessively, and the battery power is reduced. When the performance of the tool begins to decline, please stop the tool and charge the battery for the best performance.



WARNING

How to charge the battery pack

Fig. 2

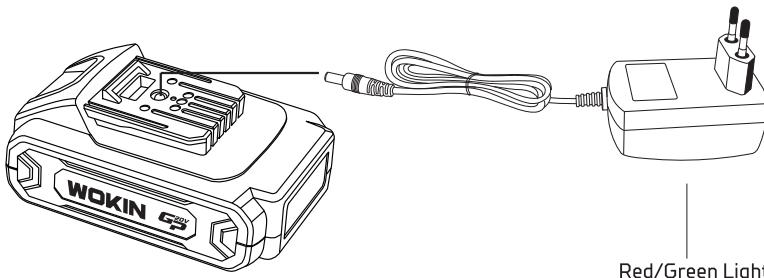

- When the battery is properly inserted into the charger and charging, the red light is on. When the battery is fully charged, the red light is off, and green light is on. Then you can remove the battery.
- When charging more than one battery pack, allow 15 minutes between charges. After many charge/discharge cycles, your battery may lose its ability to hold a charge. If so, please replace it.
- Dispose of batteries at an appropriate waste disposal facility. Do not throw batteries away in common trash receptacles.

HOW TO INSTALL THE BATTERY

Step 1:

Install battery pack or 12V car power adapter


■ **install or remove the battery pack (Figure 3)**

To install:

Slide the battery pack into the bottom until you hear a click. Make sure that the latch is in place and battery is secure before operation.

To remove:


Pull out the battery pack while pressing the battery release latch.

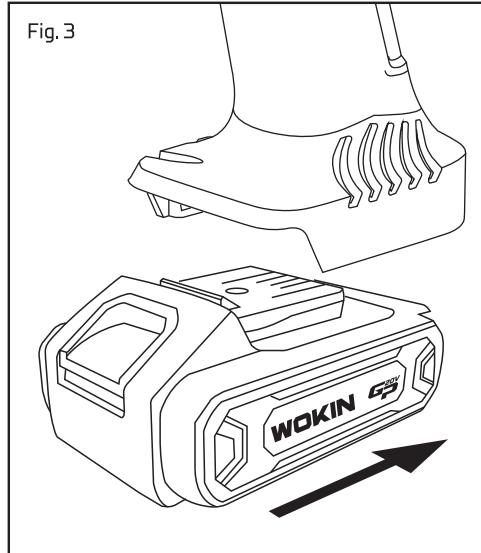

Function and operation instructions

■ Install or remove 12V car power adapter [Figure 4]


1. Unravel cord before using. If the battery is installed, remove it from the machine first by pressing battery release button and pulling out..
2. Plug the 12V car power adapter into the machine.
3. Connect the adapter into the car socket. When ready to use, power car on..

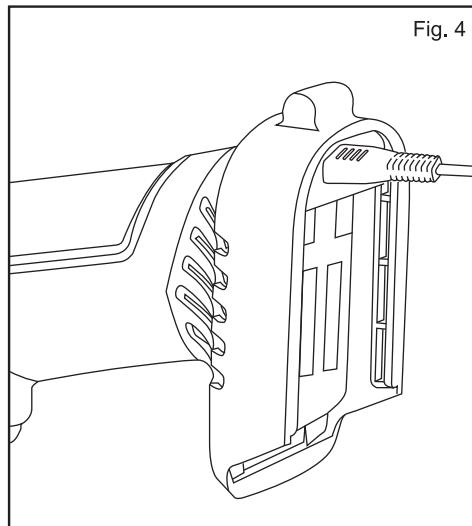

Step 2:

Connect the Air Chuck to the Valve Stem

1. Push the air chuck clamp up so that it is in the unlock position.
2. Then place the air chuck on the valve stem and make sure the threaded section of the valve stem is inside the air chuck.
3. Pressing air chuck clamp down until it stops or is parallel with the air hose.

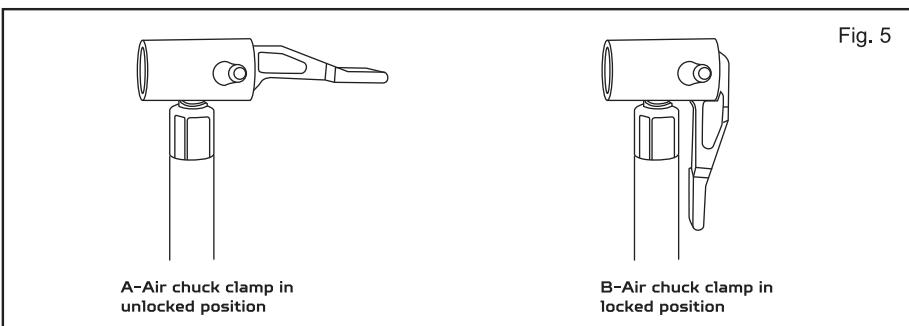

Note:

Improperly connected hoses or accessories may separate under pressure and pressure and

cause serious injury.

Possible air leaks can cause incorrect pressure readings. Ensure that all connections are secure.


Function and operation instructions

Note:

When using the inflator, make sure that the hose is free of obstacles. If the hose is blocked, it may be overheated.

Step 3: set the pressure value

Fig. 6

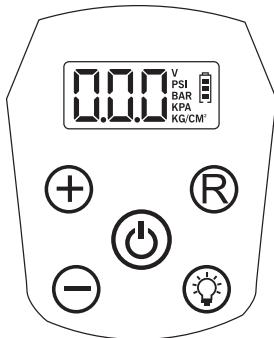

1. Press the "P" (on / unit) button to read the current tire pressure on the gauge.
2. Press the "R" button again to select the tire pressure measurement unit from PSI, KPA, BAR, KG/CM.
3. Press the "+" or "-" button to adjust the preset tire pressure. [1] Long press the "+" or "-" button to quickly adjust the working pressure. [2] Short press the "+" or "-" button to adjust the preset working pressure.
Note: increment by 0.05BAR & KG/ CM, 1 PSI, 5KPA.
4. The preset pressure value will be set after three seconds.
5. Press the start switch to inflate. When it reaches the preset pressure value, the inflator will stop working.
6. Press the "P" button (on / unit), then press the "L" button, the LED light is turned on.
And press the "L" button again, the LED light will be flashing.

Note: the tolerance of inflator is + or - 2 psi. If it is used continuously every 10 minutes, a cooling time of 3 minutes is required.

1. To reset the tire pressure measurement unit press "P" to reselect after setting preset pressure value.;
2. The digital gauge records the preset measurement unit and the value of the last operation;
3. After the air pump reaches the preset pressure value, the digital gauge will automatically shut down after 60 seconds;
4. The maximum pressure is 150 psi.



Function and operation instructions

Note:

1. Since the pressure gauge is not calibrated and not binding for exact values, tire pressure must be checked by using a reliable measuring device after inflating tires with this pump. Driving a vehicle with improperly inflated tires could result in serious injury.
2. Do not leave items that are being pumped up unattended while using the inflator. These items can burst and could cause serious injury.
3. The inflator is capable of inflating up to 6.8 Bar. To avoid over inflation, carefully follow instructions on items to be inflated. To avoid product damage, never exceed recommended pressures.
4. The inflator is not designed for commercial applications.

Storage of air hoses and accessories

When the inflator is not used, put the hose into the storage area on both sides of the tool. The adaptors and needles provided with the inflator can also be placed in the storage area.

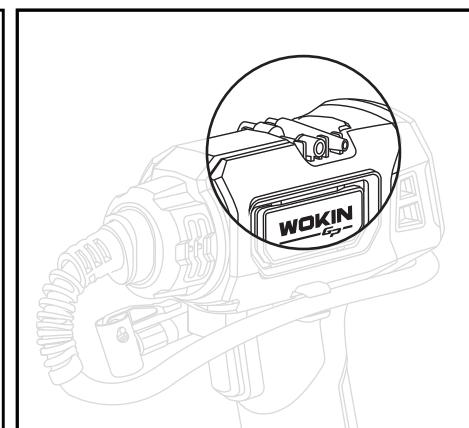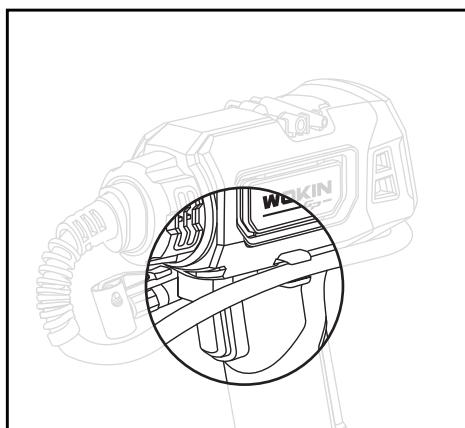

Function and operation instructions

Parts

The accessories provided have a variety of functions: the conical adapter can be used on the smaller pinch valve to inflate small items such as children's toys. Usually, the user needs to blow air to inflate them. The sports ball needle can be used to inflate various types of balls or any other items that need to inflate the sports ball needle.


Note: when inflating items of 10 psi or less, after each burst of short-term continuous inflation, check by feeling or using a calibrated measuring device to determine the accurate pressure.

How to install the ball needle?

For inflating sport balls like basketball, football, etc.

The following pictures show to hoop up the nozzle to air chuck.


Note: do not completely insert the ball needle into the air chuck to prevent the exhaust needle hole from being completely blocked.

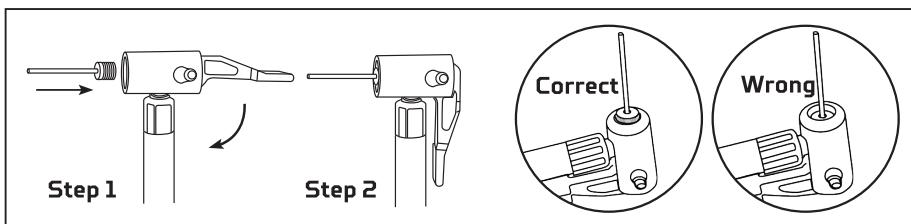

Replace the cigar lighter fuse?


If the cigar lighter can not provide power for the inflator, check the fuse and see if it is broken.

As shown below, unscrew the head of the cigar lighter, take out the broken fuse, replaced by the new fuse, and screw the head.

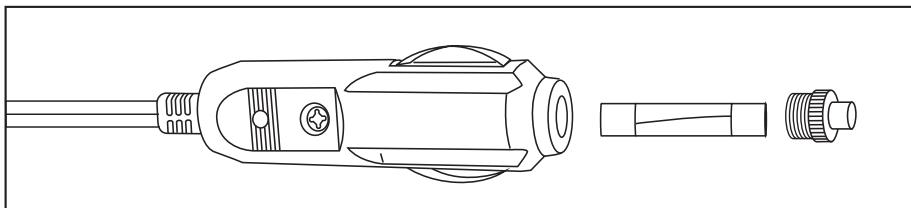

1. Do not let brake fluid, gasoline, petroleum products, penetrating oil, etc. contact with plastic parts. Chemicals may damage, weaken or breakBad plastic, resulting in serious machine injury.
2. Wipe the surface of the machine with a soft wet cloth to keep the surface of the inflator clean. Do not use solvents on plastic parts.
3. When cleaning plastic parts, avoid using solvents. Most plastics are easily damaged by various irritating solvents and canIt can be damaged due to use. Use clean cloth to remove dirt, dust, oil, grease, etc.
4. In order to maintain the best performance of the rechargeable battery, please prevent the battery from overheating, including overcharging and storage, and do not use the machine for a long timeThe battery is charged for 7 hours every three months.

INDICATING THE REMAINING BATTERY PACK

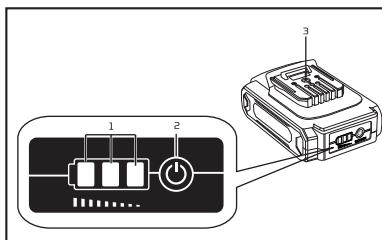

1. Indicator lamps 2. Check button. 3. DC port

Indicator lamps	Remaining capacity
Lighted	Off
■ ■ ■	75% to 100%
■ ■ ■	35% to 75%
■ ■ ■	5% to 35%

Press the check button on the battery pack to indicate the remaining battery capacity. The indicator lamps light up for a few seconds.

NOTE: Depending on the conditions of use and the ambient temperature, the indication may differ slightly from the actual capacity.

MAINTENANCE

WARNING: ALWAYS disconnect from the mains power supply, before carrying out any maintenance/cleaning of the charger. Remove the battery before carrying out any maintenance/cleaning of the appliance.

Note: Both the appliance and the charger contain no user-serviceable parts. If the device does not perform as outlined in this manual, return it to an authorised service centre for repair.

General Inspection

1. Regularly check that all the fixing screws are tight.
2. Inspect the supply cord of the tool, prior to each use, for damage or wear. Repairs should be carried out by an authorised service centre. This advice also applies to extension cords used with this tool.

Cleaning

1. Keep your tool clean at all times. Dirt and dust will cause internal parts to wear quickly, and shorten the machine's service life. Clean the body of your machine with a soft brush, or dry cloth. If available, use clean, dry, compressed air to blow through the ventilation holes.
2. Clean the tool casing with a soft damp cloth using a mild detergent. Do not use alcohol, petrol or strong cleaning agents.
3. Never use caustic agents to clean plastic parts.

Lubrication

1. Slightly lubricate all moving parts at regular intervals with a suitable spray lubricant.

Storage

1. Store this tool carefully in a secure, dry place out of the reach of children.
2. Do not store the tool and battery pack in locations where the temperature may reach or exceed 40 °C.

Disposal

Always adhere to national regulations when disposing of power tools that are no longer functional and are not viable for repair.

1. Do not dispose of power tools, or other waste electrical and electronic equipment (WEEE), with household waste.
2. Contact your local waste disposal authority for information on the correct way to dispose of power tools

TROUBLESHOOTING

Problem	Possible causes	Likely solutions
Tool will not start.	<ol style="list-style-type: none"> 1. Battery Pack not properly connected. 2. Battery Pack not properly charged. 3. Battery Pack worn out. 4. Internal damage or wear. (Carbon brushes or Trigger, for example.) 5. Contact chips of switch or battery pack deformed. 6. Battery is not suitable for WOKIN GP20V lithium-ion power platform system 7. Overload operation 	<ol style="list-style-type: none"> 1. Remove Battery Pack, make sure there are no obstructions, clean battery contacts on tool, reinsert the Battery Pack according to its shape (it should only fit one way), and press firmly until the Battery Pack locks in place. 2. Make sure Charger is connected and operating properly. Give enough time for Battery Pack to recharge properly. 3. Dispose of old Battery Pack properly or recycle. Replace Battery Pack. 4. Have technician service tool. 5. Replace switch or Battery Pack 6. Replace the battery of WOKIN GP20V 7. Stop to use and restart the machine after cooling.
Tool operates slowly.	<ol style="list-style-type: none"> 1. Excess pressure applied to workpiece. 2. Battery Pack wearing out. 3. Low battery 	<ol style="list-style-type: none"> 1. Decrease pressure, allow tool to do the work. 2. Dispose of old Battery Pack properly or recycle. Replace Battery Pack. 3. Recharge or replace a fully charged battery
Performance-decreases over time.	<ol style="list-style-type: none"> 1. Chuck damaged. 2. Battery Pack worn out. 3. Output shaft and center shaft worn out. 	<ol style="list-style-type: none"> 1. Have qualified technician replace chuck. 2. Dispose of old Battery Pack properly or recycle. Replace Battery Pack. 3. Have technician service tool.
Excessive noise or rattling.	Internal damage or wear. (gear or bearings, for example.)	Have technician service tool.
Overheating.	<ol style="list-style-type: none"> 1. Forcing tool to work too fast. 2. Blocked motor housing vents. 	<ol style="list-style-type: none"> 1. Allow tool to work at its own rate. 2. Clean the Blocked motor housing vents

CE DECLARATION OF CONFORMITY

WE

ZJG WOKIN INDUSTRIAL CO.,LTD.
350 YANGJIN ROAD, ZHANGJIAGANG,
JIANGSU, CHINA

Declare that the product

626022
CORDLESS AUTO AIR COMPRESSOR

Complies with the essential health and safety requirements of the following Directives:

council directive 2006/42/EC

Standards and technical specifications referred to:

EN IEC 55014-1:2021, EN IEC 55014-2:2021

EN IEC 61000-3-2:2019/A1:2021,

EN 61000-3-3:2013/A2:2021/AC:2022-01

EN 61000-4-2:2009, EN IEC 61000-4-3:2020,

EN 61000-4-4:2012, EN 61000-4-5:2014+A1:2017,

EN 61000-4-6:2014/AC:2015, EN 61000-4-8:2010,

EN IEC 61000-4-11:2020

Authorised Signatory and technical file holder

Signed for and on behalf of:


ZJG WOKIN INDUSTRIAL CO.,LTD.
350 YANGJIN ROAD, ZHANGJIAGANG,


JIANGSU, CHINA

CHEN XIAO CHENG

Group Quality Director

on:07/02/2022

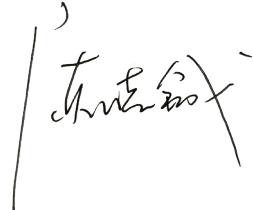

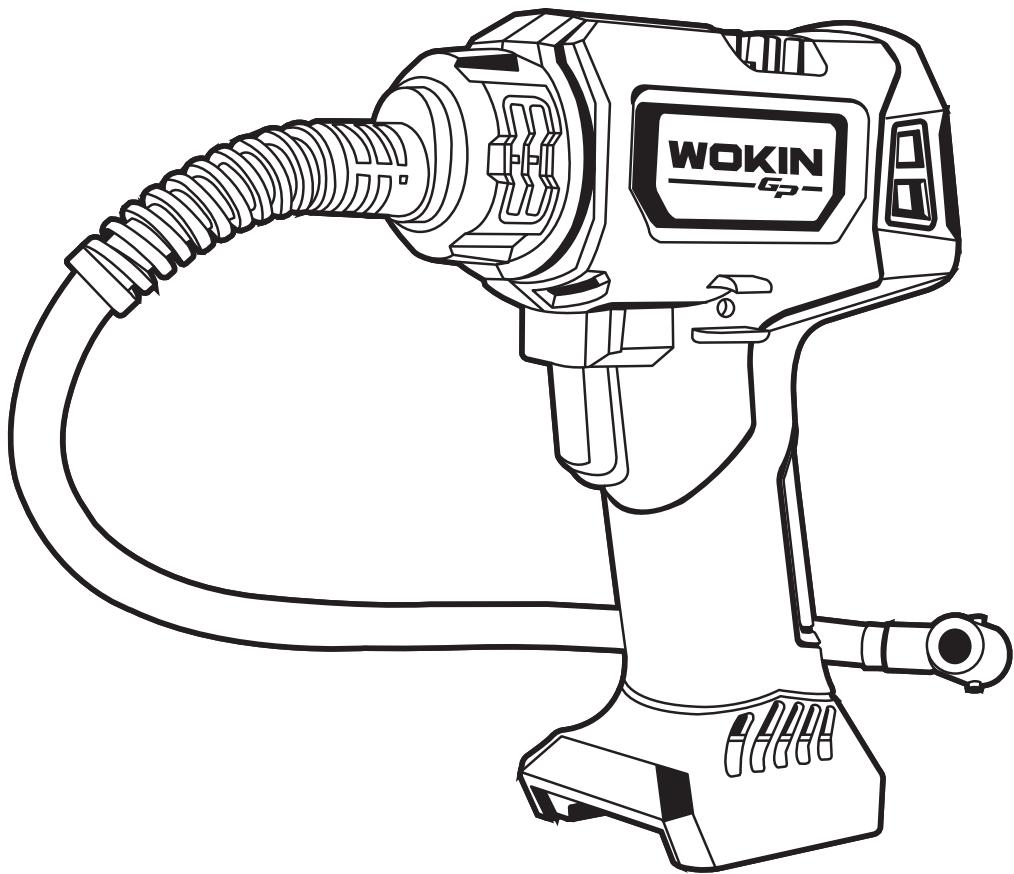

**ZJG WOKIN
INDUSTRIAL
CO.,LTD.**

www.wokintools.com
**PROFESSIONALLY
MADE IN CHINA**
WOKIN is a trademark or
registered trademark of
WOKIN TOOLS.
All rights reserved.

