


# WOKIN

854671

## RECIPROCATING SAW

### INSTRUCTION MANUAL

**6.0A  
710W  
120V~60Hz**

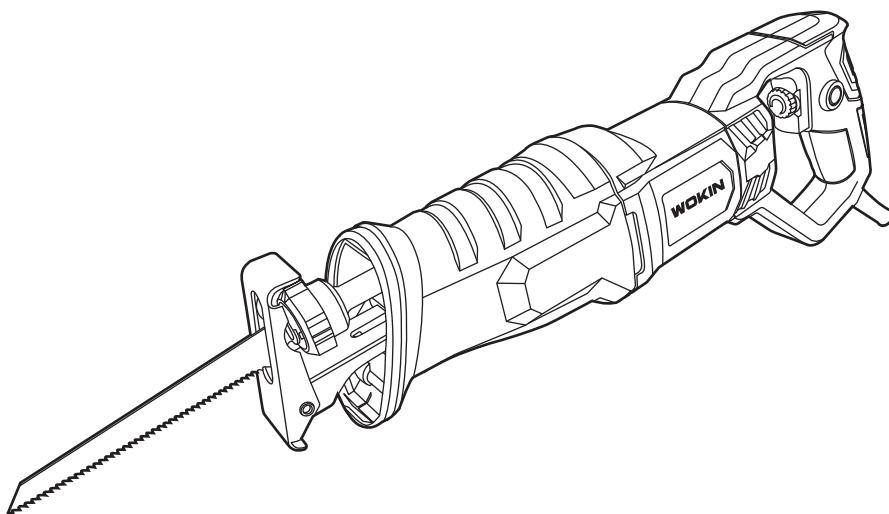

#### SAVE THIS MANUAL!

You will need this manual for safety instructions, operating procedures and warranty.  
Put it and the original sales receipt in a safe dry place for future reference.

## Reciprocating Saw Safety Warnings

---

1. Hold power tool by insulated gripping surfaces when performing an operation where cutting tool may contact hidden wiring or its own cord. Contact with a "live" wire will make exposed metal parts of the tool "live" and shock the operator.
2. Use clamps or another practical way to secure and support the work piece to a stable platform. Holding the work by hand or against your body leaves it unstable and may lead to loss of control.
3. Maintain labels and nameplates on the tool. These carry important safety information. If unreadable or missing, contact WOKIN Tools for a replacement.
4. Avoid unintentional starting. Prepare to begin work before turning on the tool.
5. Do not lay the tool down until it has come to a complete stop. Moving parts can grab the surface and pull the tool out of your control.
6. When using a handheld power tool, maintain a firm grip on the tool with both hands to resist starting torque.
7. Do not leave the tool unattended when it is plugged into an electrical outlet. Turn off the tool, and unplug it from its electrical outlet before leaving.
8. This product is not a toy. Keep it out of reach of children.
9. The warnings, precautions, and instructions discussed in this instruction manual cannot cover all possible conditions and situations that may occur. It must be understood by the operator that common sense and caution are factors which cannot be built into this product, but must be supplied by the operator.

**SPECIFICATIONS**

Rated voltage	120V~60Hz
Input power	6A [710W]
No load speed	$n_o$ : 0-2800/min
Stroke length	1" [20mm]
Max. in steel	1/4" (6mm)
Max. in wood	4-3/8" (110mm)

**Note: Symbology**

	Double Insulated
	<b>WARNING</b> mark concerning Risk of Eye Injury. Wear ANSI-approved safety goggles with side shields
	Read the manual before set-up and/or use.

**SETUP****Before Use**

Read the ENTIRE IMPORTANT SAFETY INFORMATION section at the beginning of this manual including all text under subheadings therein before set up or use of this product.

**WARNING:**

**TO PREVENT SERIOUS INJURY FROM ACCIDENTAL OPERATION: Release the Trigger, make sure the Trigger lock is not engaged and unplug the tool from its electrical outlet before adjusting the tool or installing accessories.**

**Functions**

**Figure 1**

## Tool Set Up

### Install the saw blade

#### WARNING!

**To prevent serious injury: Before plugging in the Power Cord for each use, wearing work gloves, pull on the Saw Blade to make sure it is securely locked in the Chuck.**

1. If there is an installed blade, remove it by opening the Chuck and pulling the blade out. To open the Chuck, rotate it counterclockwise and hold it in the open position.
2. Release the Chuck to close it.
3. To install the new Saw Blade, rotate and hold the Chuck counterclockwise while inserting the Saw Blade and pushing it in to its deepest position.
4. Release the Chuck to close it.
5. Check that the Saw Blade is firmly locked in place and that the teeth are pointed downward.

### Switch on/off

1. Connect the plug to the power supply, the power light (68) is illumed until disconnect from the power mains.
2. Turn on or turn off the tool by squeezing or releasing the Switch trigger (67).
3. For continuous operation just press the Trigger lock button on the left side of the handle.

### Adjusting the Pivot Shoe

#### WARNING:

**The retracted blade length should be longer than the width of the workpiece. If the Blade is shorter, the tip will jam in the workpiece during cutting, possibly causing injury and damaging the Blade or workpiece.**

1. Loosen the both cap screws in the gear frame with hex key
2. Reposition Shoe assembly in or out.
3. Retighten both cap screws securely. Do not over tighten cap screws.
4. Remove hex key.

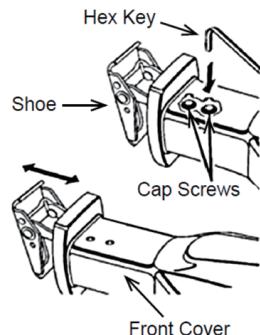


Figure 2

**GENERAL OPERATING INSTRUCTIONS**

**The Saw features a variable speed Trigger. For increased strokes per minute, squeeze the Switch trigger harder. For decreased strokes per minute, apply less pressure to the Switch trigger. When cutting softer materials, use a faster speed. When cutting harder materials, use a slower speed.**

**General Cutting**

1. Install the Blade and adjust the Shoe for the job.
2. Press and release the Trigger to ensure that the Trigger Lock is off.
3. Holding the Saw with the Trigger released, plug the Power Cord into a 120V electrical outlet.
4. To begin sawing, gripping the saw firmly with both hands, rest the front of the Shoe on your workpiece with the blade above the work.

**WARNING:**

Do not start the saw if the saw blade is in contact with anything before operation.

5. Depress the Trigger.
6. Allow the tool to come up to full speed before touching the work material.
7. Guide the saw blade into the workpiece.

**WARNING:**

Keep the Shoe pressed firmly against the workpiece while cutting to prevent tool

- kickback.
8. For continuous cutting, press and release the Trigger Lock button, then release the Trigger.
9. Maintain a smooth motion, guiding the Blade through the material as it is cut. Follow the cut. Do not press too hard. If the saw slows down as it is cutting, apply less pressure on the saw.
10. To stop the saw, release the Trigger when not using the Trigger Lock feature. If using the Trigger Lock function, press and release the Trigger.
11. Allow the tool to come to a complete stop before setting it down.
12. To prevent accidents, turn off the tool and disconnect its power supply after use. Clean, then store the tool indoors out of children's reach.

**Plunge Cutting**

**Plunge cut into plywood and thin board panels. Do not attempt to plunge cut into thick, hard wood or metal panels.**


1. Clearly mark the line of cut.
2. From a convenient starting point within the cutting area, place the tip of the Blade over that point with the Saw parallel to the line of cut.

3. Place the edge of the Shoe on the work piece with the Blade NOT touching the work material. Squeeze the Trigger to start the tool operating. Never start a plunge cut with the Blade tip

touching the work piece. This will cause an immediate kick back, that can damage the work piece, blade or cause injury.

4. Line of cut shoe rotate tool on Pivot shoe. Wait for the Saw to reach full speed, then slowly rotate the tool on the Pivot Shoe as the blade

contacts the work piece. Hold the tool firmly. 5. Continue to slowly rotate the tool until the Blade has penetrated through the work material. Press the Pivot shoe firmly against the work material and continue to make the cut.

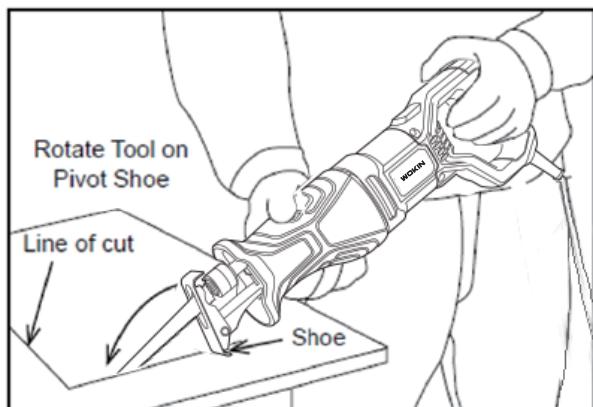

## Metal Cutting

---

**Blades specifically designated for cutting metals must be used for this purpose.**

1. Install a metal cutting blade.
2. Coat the cutting surface with cutting oil to prevent the blade from overheating.
3. Follow general cutting procedure above.

## MAINTENANCE AND SERVICING

### **WARNING:**

**TO PREVENT SERIOUS INJURY FROM ACCIDENTAL OPERATION:** Turn off the switch and unplug the tool from its electrical outlet before performing any inspection, maintenance, or cleaning procedures.

**TO PREVENT SERIOUS INJURY FROM TOOL FAILURE:** Do not use damaged equipment. If abnormal noise or vibration occurs, have the problem corrected before further use.

### Cleaning, Maintenance, and Lubrication

1. BEFORE EACH USE, inspect the general condition of the tool. Check for:
  - loose hardware,
  - misalignment or binding of moving parts,
  - cracked or broken parts,
  - damaged electrical wiring,
  - any other condition that may affect its safe operation.

#### **WARNING:**

**If the supply cord of this power tool is damaged, it must be replaced only by a qualified service technician.**

2. AFTER USE, wipe external surfaces of the tool with clean cloth.
3. TO CLEAN: The ventilation openings should be kept clean and free of dirt and debris. Wear ANSI-approved safety goggles and NIOSH-approved dust mask/respirator before cleaning ducts. The most effective way to clean

the ventilation openings is with compressed air.

4. CARBON BRUSH MAINTENANCE. The carbon brushes may require maintenance when the motor performance of the tool decreases or stops working completely.

#### **CAUTION:**

**The carbon brushes must be replaced by a pair similar carbon brush available through the after-sales service organization or qualified professional person.**

The brushes must always be replaced in pairs.

5. If you discover any damage, consult the exploded drawing and parts list to determine exactly which replacement part you need to order from our customer service department.

## TROUBLESHOOTING


Problem	Possible causes	Likely Solutions
Tool will not start.	1. Cord not connected. 2. No power at outlet. 3. Tool's thermal reset breaker tripped (if equipped). 4. Internal damage or wear. (Carbon brushes or switch, for example.)	1. Check that cord is plugged in. 2. Check power at outlet. If outlet is unpowered, turn off tool and check circuit breaker. If breaker is tripped, make sure circuit is right capacity for tool and circuit has no other loads. 3. Turn off tool and allow to cool. Press reset button on tool. 4. Have technician service tool.
Tool operates slowly.	1. Excess pressure applied to workpiece. 2. Power being reduced by long or small diameter extension cord.	1. Decrease pressure, allow tool to do the work. 2. Eliminate use of extension cord. If an extension cord is needed, use one with the proper diameter for its length and load.
Performance decreases over time.	1. Accessory dull or damaged. 2. Carbon brushes worn or damaged.	1. Keep cutting accessories sharp. Replace as needed. 2. Have qualified technician replace brushes.
Excessive noise or rattling.	Internal damage or wear. (Carbon brushes or bearings, for example.)	Have technician service tool.
Overheating.	1. Forcing tool to work too fast. 2. Accessory misaligned. 3. Accessory dull or damaged. 4. Blocked motor housing vents. 5. Motor being strained by long or small diameter extension cord.	1. Allow tool to work at its own rate. 2. Check and correct accessory to fence and/or table alignment. 3. Keep cutting accessories sharp. Replace as needed. 4. Wear ANSI approved safety goggles and NIOSH approved dust mask/respirator while blowing dust out of motor using compressed air. 5. Eliminate use of extension cord. If an extension cord is needed, use one with the proper diameter for its length and load. See General Power Tool Safety Warnings section.

**WARNING:**

Follow all safety precautions whenever diagnosing or servicing the tool. Disconnect power supply before service.

## NOTE

## NOTE

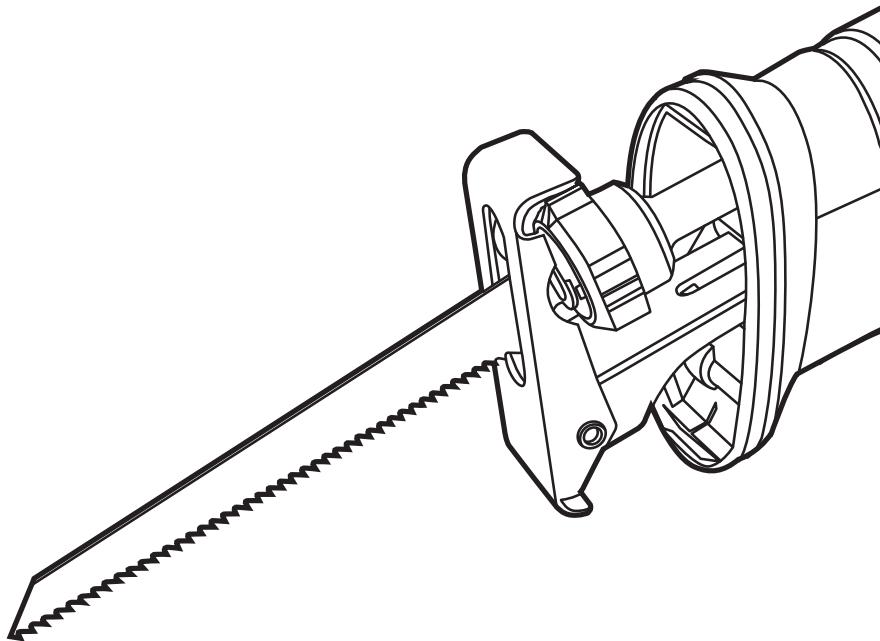

**ZJG WOKIN  
INDUSTRIAL  
CO.,LTD.**  
[www.wokintools.com](http://www.wokintools.com)  
**PROFESSIONALLY  
MADE IN CHINA**  
WOKIN is a trademark or  
registered trademark of  
WOKIN TOOLS.  
All rights reserved.

